9.4.1.1 Centre zone

9.4.1.1 Reconfiguring a lot code - Centre zone

9.4.1.1.1 Purpose - Centre zone

- The purpose of this part of the Reconfiguring a lot code is to facilitate and manage the outcomes of development for reconfiguring a lot and its associated Operational Works in the Centre zone, to achieve the Overall Outcomes.
- 2. The purpose of this part of the code will be achieved through the overall outcomes as identified in Part 9.4.1 Reconfiguring a lot code and the following additional Centre zone specific overall outcomes:
 - a. Reconfiguring a lot:
 - i. does not cause the unnecessary fragmentation of land that may inhibit the future development of the land as intended by the stated outcomes for the centre; and
 - ii. results in lots having a shape, size and dimension that preserves the opportunities for a development of the lot to achieve the stated outcomes for the centre; and
 - iii. preserves the greatest opportunities for the creation of Active frontages; and
 - iv. provides opportunities for lawful vehicle and/or pedestrian connections between sites, public land or active uses (for example access easements between adjoining carparks that may be volumetric connections between buildings above or below the surface of the ground); and
 - v. provides opportunities for lawful interconnected servicing between sites with vehicle connections across an Active frontage minimised or avoided wherever possible by providing vehicle access locations at alternative locations.
 - b. Reconfiguring a lot delivers lot sizes and dimensions that will assist in the delivery of a scale and intensity of development commensurate with centre activities consistent in the applicable precinct.
 - c. Reconfiguring a lot avoids areas subject to constraint, limitation, or environmental values. Where reconfiguring a lot cannot avoid these identified areas, it responds by:
 - i. adopting a 'least risk, least impact' approach when designing, siting and locating development to minimise the potential risk to people, property and the environment;
 - ii. ensuring no further instability, erosion or degradation of the land, water or soil resource;
 - iii. maintaining environmental values, including natural, ecological, biological, aquatic, hydrological and amenity values, and enhancing these values through the provision of environmental offsets, landscaping and facilitating safe wildlife movement through the environment;
 - iv. protecting native species and protecting and enhancing native species habitat;
 - v. protecting and preserving the natural, aesthetic, architectural historic and cultural values of significant trees, places, objects and buildings of heritage and cultural significance;
 - vi. establishing effective separation distances, buffers and mitigation measures associated with major infrastructure to minimise adverse effects on sensitive land uses from noise, dust and other nuisance generating activities;
 - vii. ensuring it promotes and does not undermine the ongoing viability, integrity, operation, maintenance and safety of major infrastructure;

- viii. Ensuring effective and efficient disaster management response and recovery capabilities.
- d. The Reconfiguring a lot, Operational works associated with the Reconfiguring a lot, and uses expected to occur as a result of the Reconfiguring a lot:
 - i. responds to the risk presented by overland flow and minimises risk to personal safety;
 - ii. is resilient to overland flow impacts by ensuring the siting and design accounts for the potential risks to property associated with overland flow;
 - iii. does not impact on the conveyance of overland flow up to and including the Overland Flow Defined Flood Event:
 - iv. directly, indirectly and cumulatively avoids an increase in the severity of overland flow and potential for damage on the premises or to a surrounding property.
- e. Reconfiguring a lot achieves the intent and purpose of the Centre zone outcomes as identified in Part 6 or where in the Redcliffe Kippa-Ring local plan area, achieves the intent and purpose of the Redcliffe Kippa-Ring local plan and applicable precinct as identified in Part 7.

9.4.1.1.2 Requirement for assessment

Part A - Criteria for assessable development - Centre zone

Where development is categorised as assessable development - code assessment in the Table of Assessment, the assessment benchmarks are the criteria set out in Part A, Table 9.4.1.1.1 as well as the purpose statement and overall outcomes of this code.

Where development is categorised as assessable development - impact assessable, the assessment benchmarks become the whole of the planning scheme.

Assessable development - Centre zone

Performance outcomes		Examples that achieve aspects of the Performance Outcomes		
Lot	size and design			
PO1		E1		
Lots have appropriate area and dimension for the establishment of uses consistent with the applicable precinct of the Centres zone, having regard to:		Lots comply with the following minimum sizes to facilitate appropriate uses and preferred scale and intensity of development:		
a.	convenient and safe access;	Zone (Precinct)	Min. lot size	Min. frontage
b.	on-site car parking;	Centre Zone		
c.	service vehicle access and manoeuvring;	Higher order	1000m²	40m
d.	appropriately sited loading and servicing areas;	District	1000m²	20m
e.	setbacks, buffers to sensitive land uses and landscaping where required.	Local	N/A	N/A
		Redcliffe Kippa-Ring Loca	al Plan	

	1		
Note - refer to the overall outcomes for the Centre zone (applicable precinct) for uses consistent in this precinct.	Redcliffe seaside village precinct; Kippa-Ring village precinct Local services precinct;	1000m ²	40m
	Health precinct		
PO2	E2.1		
e layout and frontage of lots does not result in the ed for additional or wider vehicle cross overs that ght impede pedestrian activity and movement along e primary frontage with access arrangements	Lots having a primary street frontage of less than 20m are provided with a secondary street access for vehicle movements.		
between sites provided wherever possible and where able, secured by easement.	E2.2		
	Lots have rear service lane access.		
	E2.3		
	Shared vehicle access arrangements are provided between adjoining lots and secured by easement.		
	Note - An registered access ensure shared access between		
	Note - Buildings on the site was primary street frontage in accode.		
PO3	E3		
The creation of additional allotments adjoining arterial and sub-arterial roads does not adversely affect the safety and efficiency of these roads (refer Overlay map - Road hierarchy).	New lots on arterial and sub-arterial roads are provided with a secondary street access for vehicle movements.		
	Note - Buildings on the site was primary street frontage in accode.		
PO4	No example provided.		
Where adjoining and adjacent to existing or proposed public spaces, reconfiguring a lot promotes safety, amenity and activity within the public space by facilitating connections to existing footpaths or roadways.			
PO5	No example provided.		
The layout of the development results in the creation of a strong and positive identity through:			

the provision of clearly legible movement and open space networks; b. an appropriate design response to site and locality characteristics. **PO6** No example provided. Lots do not compromise the viability of adjoining lots and provide for optimum integration with existing or future development on surrounding land, having regard to: the connectivity of access and open space a. networks; b. the efficient provisions of infrastructure; the appropriate location of boundaries and road C. reserves. **Utilities PO7** No example provided. All services including water supply, sewage disposal, electricity, street lighting, telecommunications and gas (if available) are provided in accordance with Planning scheme policy - Integrated design (Appendix A). Street design and layout **PO8** No example provided. The road network creates convenient access to arterial and sub-arterial roads for heavy vehicles and commercial traffic without introducing through traffic to residential streets. PO9 E9.1 Development maintains, contributes to or provides Development provides and maintains the connections for a street layout that is designed to connect to shown on the following movement figures: surrounding neighbourhoods, providing an Figure 1 - Morayfield - Anderson Road interconnected street, pedestrian and cyclist network a. Figure 2 - Deception Bay - Bailey Road / Park b. that connects nearby centres, neighbourhood hubs, community facilities, public transport nodes and open Road space to residential areas. C. Figure 3 - Mango Hill d. Figure 4 - Kallangur Note - Refer to Planning scheme policy - Neighbourhood design

for guidance on how to achieve compliance with this outcome.

E9.2

For areas not shown on the above movement figures, no example provided. Note - Refer to Planning scheme policy - Neighbourhood design for guidance on achieving the Performance outcome. **PO10** No example provided. Streets are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. The street design and construction accommodates the following functions: a. access to premises by providing convenient vehicular movement for residents between their homes and the major road network; b. safe and convenient pedestrian and cycle movement: C. adequate on street parking; d. stormwater drainage paths and treatment facilities; e. efficient public transport routes; f. utility services location; emergency access and waste collection; g. h. setting and approach (streetscape, landscaping and street furniture) for adjoining residences; i. expected traffic speeds and volumes; and j. wildlife movement (where relevant). Note - Preliminary road design (including all services, street lighting, stormwater infrastructure, access locations, street trees and pedestrian network) may be required to demonstrate compliance with this PO. Note - Refer to Planning scheme policy - Environmental areas and corridors for examples of when and where wildlife movement infrastructure is required. PO11 E11.1

New intersections onto existing roads are designed

movements taken from a date 10 years from the date

to accommodate traffic volumes and traffic

The existing road network (whether trunk or non-trunk)

is upgraded where necessary to cater for the impact

from the development.

Note - An applicant may be required to submit an Integrated Transport Assessment (ITA), prepared in accordance with Planning scheme policy - Integrated transport assessment to demonstrate compliance with this PO, when any of the following occurs:

- Development is within 200m of a transport sensitive location such as a school, shopping centre, bus or train station or a large generator of pedestrian or vehicular traffic;
- Forecast traffic to/from the development exceeds 5% of the two way flow on the adjoining road or intersection in the morning or afternoon transport peak within 10 years of the development completion;
- Development access onto a sub arterial, or arterial road or within 100m of a signalised intersection;
- Residential development greater than 50 lots or dwellings;
- Offices greater than 4,000m² Gross Floor Area (GFA);
- Retail activities including Hardware and trade supplies, Showroom, Shop or Shopping centre greater than 1,000m² GFA;
- Warehouses and Industry greater than 6,000m² GFA;
- On-site carpark greater than 100 spaces;
- Development has a trip generation rate of 100 vehicles or more within the peak hour;
- Development which dissects or significantly impacts on an environmental area or an environmental corridor.

The ITA is to review the development's impact upon the external road network for the period of 10 years from completion of the development. The ITA is to provide sufficient information for determining the impact and the type and extent of any ameliorative works required to cater for the additional traffic. The ITA must include a future structural road layout of adjoining properties that will form part of this catchment and road connecting to these properties. The ITA is to assess the ultimate developed catchment's impacts and necessary ameliorative works, and the works or contribution required by the applicant as identified in the study.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The primary and secondary active transport network is mapped on Overlay map - Active transport.

of completion of the last stage of the development. Design is to be in accordance with Planning scheme policy - Integrated design.

Note - All turns vehicular access to existing lots is to be retained at new road intersections wherever practicable.

Note - Existing on-street parking is to be retained at new road intersections and along road frontages wherever practicable.

E11.2

Existing intersections external to the site are upgraded as necessary to accommodate increased traffic from the development. Design is in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

Note - All turns vehicular access to existing lots is to be retained at upgraded road intersections wherever practicable.

Note - Existing on-street parking is to be retained at upgraded road intersections and along road frontages wherever practicable.

E11.3

The active transport network is extended in accordance with Planning scheme policy - Integrated design.

PO12

New intersections along all streets and roads are located and designed to provide safe and convenient movements for all users.

E12

New intersection spacing (centreline – centreline) along a through road conforms with the following:

Note - Refer Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures for design and construction standards.

Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.

- a. Where the through road provides an access function:
 - i. intersecting road located on the same side= 60 metres;
 - ii. intersecting road located on opposite side (Left Right Stagger) = 60 metres;
 - iii. intersecting road located on opposite side (Right Left Stagger) = 40 metres.
- b. Where the through road provides a collector or sub-arterial function:
 - i. intersecting road located on the same side= 100 metres;
 - ii. intersecting road located on opposite side (Left Right Stagger) = 100 metres;
 - iii. intersecting road located on opposite side (Right Left Stagger) = 60 metres.
- Where the through road provides an arterial function:
 - i. intersecting road located on the same side= 300 metres;
 - ii. intersecting road located on opposite side (Left Right Stagger) = 300 metres;
 - iii. intersecting road located on opposite side (Right Left Stagger) = 300 metres.
- d. Walkable block perimeter does not exceed 1000 metres.

Note - Based on the absolute minimum intersection spacing identified above, all turns access may not be permitted (ie. left in/left out only) at intersections with sub-arterial roads or arterial roads.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - An Integrated Transport Assessment (ITA) including preliminary intersection designs, prepared in accordance with Planning scheme policy - Integrated transport assessment may be required to demonstrate compliance with this PO. Intersection spacing will be determined based on the deceleration and queue storage distances required for the intersection after considering vehicle speed and present/forecast turning and through volumes.

PO13

All Council controlled frontage roads adjoining the development are designed and constructed in accordance with Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedure. All new works are extended to join any existing works within 20m.

Note - Frontage roads include streets where no direct lot access is provided.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - The Primary and Secondary active transport network is mapped on Overlay map - Active transport.

Note - Roads are considered to be constructed in accordance with Council's standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

E13

Design and construct all Council controlled frontage roads in accordance with Planning scheme policy - Integrated design, Planning scheme policy - Operational works inspection, maintenance and bonding procedures and the following:

Situation	Minimum construction
Frontage road unconstructed or gravel road only; OR Frontage road sealed but not constructed* to Planning scheme policy - Integrated design standard; OR Frontage road partially constructed* to Planning scheme policy - Integrated design standard.	Construct the verge adjoining the development and the carriageway (including development side kerb and channel) to a minimum sealed width containing near side parking lane (if required), cycle lane (if required), 2 travel lanes plus 1.5m wide (full depth pavement) gravel shoulder and table drainage to the opposite side. The minimum total travel lane width is:
	6m for minor roads;7m for major roads.

Note - Major roads are sub-arterial roads and arterial roads. Minor roads are roads that are not major roads.

Note - Construction includes all associated works (services, street lighting and linemarking).

Note - Alignment within road reserves is to be agreed with Council.

Note - *Roads are considered to be constructed in accordance with Council standards when there is sufficient pavement width, geometry and depth to comply with the requirements of Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures. Testing of the existing pavement may be required to confirm whether the existing works meet the standards in Planning scheme policy - Integrated design and Planning scheme policy - Operational works inspection, maintenance and bonding procedures.

PO14

Sealed and flood free road access during the minor storm event is available to the site from the nearest arterial or sub-arterial road.

Editor's note - Where associated with a State-controlled road, further requirements may apply, and approvals may be required from the Department of Transport and Main Roads.

E14

Roads or streets giving access to the development from the nearest arterial or sub-arterial road are flood free during the minor storm event and are sealed.

Note - The road network is mapped on Overlay map - Road hierarchy.

PO15

Roads which provide access to the site from an arterial or sub-arterial road remain trafficable during major storm events without flooding or impacting upon residential properties or other premises.

E15.1

Access roads to the development have sufficient longitudinal and cross drainage to remain safely trafficable during major storm (1% AEP) events.

Note - The road network is mapped on Overlay map - Road hierarchy.

Note - Refer to QUDM for requirements regarding trafficability.

E15.2

Culverts and causeways do not increase inundation levels or increase velocities, for all events up to the defined flood event, to upstream or downstream properties.

Stormwater location and design

PO16

Where development is for an urban purpose that involves a land 2500m² or greater in size and results in 6 or more lots, stormwater quality management systems are designed, constructed, established and maintained to minimise the environmental impact of stormwater on surface, groundwater and receiving water environments and meet the design objectives outlined in Schedule 10 - Stormwater management design objectives.

Note - A site based stormwater management plan prepared by a suitably qualified professional will be required in accordance with Planning scheme policy - Stormwater management. Stormwater quality infrastructure is to be designed in accordance with Planning scheme policy - Integrated design (Appendix C).

No example provided.

PO17

Development is designed and constructed to achieve Water Sensitive Urban Design best practice including:

No example provided.

- a. protection of existing natural features;
- b. integrating public open space with stormwater corridors or infrastructure;
- maintaining natural hydrological behaviour of catchments and preserving the natural water cycle;
- d. protecting water quality environmental values of surface and ground waters;
- e. minimising capital and maintenance costs of stormwater infrastructure.

Note - Refer to Planning scheme policy - Integrated design (Appendix C) for more information and examples on water sensitive urban design.

Note - A site based stormwater management plan prepared in accordance with Planning scheme policy - Stormwater management may be required to demonstrate compliance with this PO.

PO18

Stormwater drainage infrastructure (including inter-allotment drainage) within private land is protected by easements in favour of Council with sufficient area for practical access for maintenance.

Note - In order to achieve a lawful point of discharge, stormwater easements may also be required over temporary drainage channels/infrastructure where stormwater discharges to a balance lot prior to entering Council's stormwater drainage system.

E18

Stormwater drainage infrastructure (excluding detention and bio-retention systems) through or within private land (including inter-allotment drainage) is protected by easements in favour of Council. Minimum easement widths are as follows:

Pipe Diameter	Minimum Easement Width (excluding access requirements)
Stormwater pipe up to 825mm diameter	3.0m
Stormwater pipe up to 825mm diameter with sewer pipe up to 225m diameter	4.0m
Stormwater pipe greater than 825mm diameter	Easement boundary to be 1m clear of the outside wall of the stormwater pipe (each side).

Note - Additional easement width may be required in certain circumstances in order to facilitate maintenance access to the stormwater system.

	Note - Refer to Planning scheme policy - Integrated design (Appendix C) for easement requirements over open channels.
PO19	No example provided.
Stormwater management facilities are located outside of riparian areas and prevent increased channel bed and bank erosion.	
PO20	No example provided.
Natural streams and riparian vegetation are retained and enhanced through revegetation.	
PO21	E21
Areas constructed as detention basins:	Stormwater detention basins are designed and
a. are adaptable for passive recreation;	constructed in accordance with Planning scheme policy - Integrated design (Appendix C) and Planning
b. appear to be a natural land form;	scheme policy - Operational works inspection, maintenance and bonding procedures.
c. provide practical access for maintenance purposes;	
d. do not create safety or security issues by creating potential concealment areas;	
e. have adequate setbacks to adjoining properties;	
f. are located within land to be dedicated to Council as public land.	
PO22	No example provided.
Development maintains the environmental values of waterway ecosystems.	
PO23	No example provided.
A constructed waterbody proposed to be dedicated as public asset is to be avoided, unless there is an overriding need in the public interest.	
PO24	E24
Lots are of a sufficient grade to accommodate effective stormwater drainage to a lawful point of discharge.	The surface level of a lot is at a minimum grade of 1:100 and slopes towards the street frontage, or other lawful point of discharge.

Stormwater management system		
PO2	25	E25
The major drainage system has the capacity to safely convey stormwater flows for the defined flood event.		The roads, drainage pathways, drainage features and waterways safely convey the stormwater flows for the defined flood event without allowing flows to encroach upon private lots.
PO2	26	E26
con:	rland flow paths (for any storm event) from newly structed roads and public open space areas do pass through private lots and allow safe and venient access for pedestrians and cyclists.	Drainage pathways are provided to accommodate overland flows from roads and public open space areas. The overland flow paths have a minimum width of 8m and are designed and constructed to allow safe and convenient access for pedestrians and cyclists.
PO2	27	E27
Provide measures to properly manage surface flows for the 1% AEP event (for the fully developed catchment) draining to and through the land to ensure no actionable nuisance is created to any person or premises as a result of the development. The development must not result in ponding on adjacent land, redirection of surface flows to other premises or blockage of a surface flow relief path for flows exceeding the design flows for any underground system within the development.		The stormwater drainage system is designed and constructed in accordance with Planning scheme policy - Integrated design.
PO	28	No example provided.
The	stormwater management system is designed to:	
a.	protect the environmental values in downstream waterways;	
b.	maintain ground water recharge areas;	
C.	preserve existing natural wetlands and associated buffers;	
d.	avoid disturbing soils or sediments;	
e.	avoid altering the natural hydrologic regime in acid sulfate soil and nutrient hazardous areas;	
f.	maintain and improve receiving water quality;	
g.	protect natural waterway configuration;	
h.	protect natural wetlands and vegetation;	

i.	protect downstream and adjacent properties;	
j.	protect and enhance riparian areas.	
PO	29	No example provided.
	ign and construction of the stormwater nagement system:	
a.	utilise methods and materials to minimise the whole of lifecycle costs of the stormwater management system; and	
b.	are coordinated with civil and other landscaping works.	
Note - Refer to Planning scheme policy - Integrated design for guidance on how to demonstrate achievement of this performance outcome.		
Boundary realignment		
PO	30	No example provided.
Boundaries realignment:		
a.	do not result in the creation of additional lots;	
b.	is an improvement on the existing land use situation;	
C.	do not result in existing land uses on-site becoming non-compliant with planning scheme criteria;	

Reconfiguring existing development by Community Title

PO31

Reconfiguring a lot which creates or amends a

consistent with the zone;

community title scheme as described in the *Body*Corporate and Community Management Act 1997 is

result in lots which have appropriate size, dimensions and access to cater for uses

ensure infrastructure and services are wholly

ensure the uninterrupted continuation of lots providing for their own private servicing.

contained within the lot they serve;

No example provided.

d.

e.

f.

undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is:

- a. inconsistent with any approvals on which those uses rely; or
- b. inconsistent with the requirements for accepted development applying to those uses at the time that they were established.

Note - Examples of land uses becoming unlawful include, but are not limited to the following:

a. Land on which a Multiple dwelling as been established is reconfigured in a way that precludes lawful access to required communal facilities by either incorporating some of those facilities into private lots or otherwise obstructing the normal access routes to those facilities. Those communal facilities may have been required under the requirements for accepted development for the use or conditions of development approval.

Editor's note - To satisfy this performance outcome, the development application may need to be a combined application for reconfiguring a lot and a material change of use or otherwise be supported by details that confirm that the land use still satisfies all relevant land use requirements.

Reconfiguring by Lease

PO32

Reconfiguring a lot which divides land or buildings by lease in a way that allows separate occupation or use of those facilities is undertaken in a way that does not result in existing uses on the land becoming unlawful or otherwise operating in a manner that is:

- inconsistent with any approvals on which those uses rely; or
- inconsistent with the requirements for accepted development applying to those uses at the time that they were established.

Note - An example of a land use becoming unlawful is a building over which one or more leases have been created in a way that precludes lawful access to some of the required communal facilities. Some of the communal car parking facilities have been incorporated into lease areas while other leases are located in a way that obstructs the normal access routes to other communal facilities. Those communal facilities may have been required under the requirements for accepted development for the use or conditions of development approval, but they are no longer freely available to all occupants of the building.

Editor's note -To satisfy this performance outcome, the development application may need to be supported by details that confirm that the land use still satisfies all relevant land use requirements.

No example provided.

Editor's note – Under the definition in Schedule 2 of the Act, the following do not constitute reconfiguring a lot and are not subject to this performance outcome: a lease for a term, including renewal options, not a. exceeding 10 years; and b. an agreement for the exclusive use of part of the common property for a community titles scheme under the Body Corporate and Community Management Act 1997. Volumetric subdivision **PO33** No example provided. The reconfiguring of the space above or below the surface of the land ensures appropriate area, dimensions and access arrangements to cater for uses consistent with the zone and does not result in existing land uses on site becoming non-compliant. Note - Example include but are not limited to: Where a commercial or industrial land use contains an ancillary office, the office cannot be separately titled as it is considered part of the commercial or industrial use. **Access Easements PO34** No example provided. Access easements contain a driveway constructed to an appropriate standard for the intended use. **PO35** No example provided. Where the access easement adjoins a constructed road, it has appropriate grade, verge cross section and safe sight distance for accessing vehicles, through traffic, and active transport users. **PO36** E36 The easement covers all works associated with the The easement covers all driveway construction access. including cut and fill batters, drainage works and utility services.

No example provided.

Native vegetation where not located in the Environmental areas overlay

Relocation or alteration of existing services are undertaken as a result of the access easement.

PO37

PO38

Reconfiguring a lot facilitates the retention of native vegetation by:

- incorporating native vegetation and habitat trees into the overall subdivision design, development layout, on-street amenity and landscaping where practicable;
- ensuring habitat trees are located outside a development footprint. Where habitat trees are to be cleared, replacement fauna nesting boxes are provided at the rate of 1 nest box for every hollow removed. Where hollows have not yet formed in trees > 80cm in diameter at 1.3m height, 3 nest boxes are required for every habitat tree removed.
- c. providing safe, unimpeded, convenient and ongoing wildlife movement;
- d. avoiding creating fragmented and isolated patches of native vegetation.
- e. ensuring that biodiversity quality and integrity of habitats is not adversely impacted upon but are maintained and protected;
- f. ensuring that soil erosion and land degradation does not occur;
- ensuring that quality of surface water is not adversely impacted upon by providing effective vegetated buffers to water bodies.

No example provided.

Noise

PO39

Noise attenuation structure (e.g. walls, barriers or fences):

- contribute to safe and usable public spaces, through maintaining high levels of surveillance of parks, streets and roads that serve active transport purposes (e.g. existing or future pedestrian paths or cycle lanes etc);
- b. maintain the amenity of the streetscape.

Note - A noise impact assessment may be required to demonstrate compliance with this PO. Noise impact assessments are to be prepared in accordance with Planning scheme policy - Noise.

E39

Noise attenuation structures (e.g. walls, barriers or fences):

- a. are not visible from an adjoining road or public area unless;
- i. adjoining a motorway or rail line; or
- ii. adjoining part of an arterial road that does not serve an existing or future active transport purpose (e.g. pedestrian paths or cycle lanes) or where attenuation through building location and materials is not possible.

Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.

- do not remove existing or prevent future active transport routes or connections to the street network;
- c. are located, constructed and landscaped in accordance with Planning scheme policy Integrated design.

Note - Refer to Planning Scheme Policy – Integrated design for details and examples of noise attenuation structures.

Note - Refer to Overlay map — Active transport for future active transport routes.

Values and constraints criteria

Note - The relevant values and constraints criteria do not apply where the development is consistent with a current Development permit for Reconfiguring a lot or Material change of use or Operational work, where that approval has considered and addressed (e.g. through a development footprint plan (or similar in the case of Landslide hazard) or conditions of approval) the identified value or constraint under this planning scheme.

Environmental areas (refer Overlay map - Environmental areas and corridors to determine if the following assessment criteria apply)

 $Note-The\ identification\ of\ a\ development\ footprint\ will\ assist\ in\ demonstrating\ compliance\ with\ the\ following\ performance\ standards.$

Editors' Note - The accuracy of overlay mapping can be challenged through the development application process (code assessable development) or by way of a planning scheme amendment. See Council's website for details.

PO40

No new boundaries are located within 2m of High Value Areas.

No example provided.

PO41

Lots are designed to:

- minimise the extent of encroachment into the MLES waterway buffer or a MLES wetland buffer;
- ensure quality and integrity of biodiversity and ecological values is not adversely impacted upon but are maintained and protected;
- incorporate native vegetation and habitat trees into the overall subdivision design, development layout, on-street amenity and landscaping where practicable;

E41

Reconfiguring a lot ensures that no additional lots are created within a Value Offset Area.

- d. provide safe, unimpeded, convenient and ongoing wildlife movement;
- e. avoid creating fragmented and isolated patches of native vegetation;
- f. ensuring that soil erosion and land degradation does not occur;
- ensuring that quality of surface water is not adversely impacted upon by providing effective vegetated buffers to water bodies.

AND

Where development results in the unavoidable loss of native vegetation within a MLES waterway buffer or a MLES wetland buffer, an environmental offset is required in accordance with the environmental offset requirements identified in Planning scheme policy - Environmental areas.

Heritage and landscape character (refer Overlay map - Heritage and landscape character to determine if the following assessment criteria apply)

Note - The identification of a development footprint will assist in demonstrating compliance with the following performance standards.

PO42

Lots do not:

- a. reduce public access to a heritage place, building, item or object;
- create the potential to adversely affect views to and from the heritage place, building, item or object;
- obscure or destroy any pattern of historic subdivision, historical context, landscape setting or the scale and consistency of the urban fabric relating to the local heritage place.

No example provided.

PO43

Reconfiguring a lot retains significant trees and incorporates them into the subdivision design, development layout and provision of infrastructure.

No example provided.

Infrastructure buffers (refer Overlay map - Infrastructure buffers to determine if the following assessment criteria apply)

Bulk water supply infrastructure PO44 No example provided. Reconfiguration of lots does not compromise or adversely impact upon the efficiency and integrity of Bulk water supply infrastructure. **PO45** E45 Reconfiguring of lots ensures that access Bulk water supply infrastructure traversing or within requirements of Bulk water supply infrastructure are private land are protected by easement in favour of maintained. the service provider for access and maintenance. **PO46** E46

Note - the identification of a development footprint will assist in demonstrating compliance with the following performance standards.

Development within a Bulk water supply infrastructure buffer:

- a. is located, designed and constructed to protect the integrity of the water supply pipeline;
- maintains adequate access for any required maintenance or upgrading work to the water supply pipeline.

No example provided.

New lots provide a development footprint outside the

Bulk water supply infrastructure buffer.

PO47

Boundary realignments:

- do not result in the creation of additional building development opportunities within the buffer;
- b. result in the reduction of building development opportunities within the buffer.

Overland flow path (refer Overlay map - Overland flow path to determine if the following assessment criteria apply)

Note - The applicable river and creek flood planning levels associated with defined flood event (DFE) within the inundation area can be obtained by requesting a flood check property report from Council.

PO48

No example provided.

- Development:
- a. minimises the risk to persons from overland flow;
- does not increase the potential for damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.

PO49

Development:

- maintains the conveyance of overland flow predominantly unimpeded through the premises for any event up to and including the 1% AEP for the fully developed upstream catchment;
- does not concentrate, intensify or divert overland flow onto an upstream, downstream or surrounding property.

Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.

E49

Development ensures that any buildings are not located in an Overland flow path area.

Note: A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding property.

PO50

Development does not:

- directly, indirectly or cumulatively cause any increase in overland flow velocity or level;
- increase the potential for flood damage from overland flow either on the premises or on a surrounding property, public land, road or infrastructure.

Note - Open concrete drains greater than 1m in width are not an acceptable outcome, nor are any other design options that may increase scouring.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.

No example provided.

PO51

Development ensures that overland flow is not conveyed from a road or public open space onto a private lot, unless the development is in a Rural zone.

E51

Development ensures that overland flow paths and drainage infrastructure is provided to convey overland flow from a road or public open space area away from a private lot, unless the development is in the Rural zone.

PO52

E52.1

Development ensures that Council and inter-allotment drainage infrastructure, overland flow paths and open drains through private property cater for overland flows for a fully developed upstream catchment flows and are able to be easily maintained.

Note - A report from a suitably qualified Registered Professional Engineer Queensland is required certifying that the development does not increase the potential for significant adverse impacts on an upstream, downstream or surrounding premises.

Note - Reporting to be prepared in accordance with Planning scheme policy – Flood hazard, Coastal hazard and Overland flow.

Development ensures that roof and allotment drainage infrastructure is provided in accordance with the following relevant level as identified in QUDM:

- a. Urban area Level III;
- b. Rural area N/A;
- c. Industrial area Level V;
- d. Commercial area Level V.

E52.2

Development ensures that all Council and allotment drainage infrastructure is designed to accommodate any event up to and including the 1% AEP for the fully developed upstream catchment.

PO53

Development protects the conveyance of overland flow such that easements for drainage purposes are provided over:

- a. a stormwater pipe if the nominal pipe diameter exceeds 300mm;
- b. an overland flow path where it crosses more than one property; and
- c. inter-allotment drainage infrastructure.

Note - Refer to Planning scheme policy - Integrated design for details and examples.

Note - Stormwater drainage easement dimensions are provided in accordance with Section 3.8.5 of QUDM.

No example provided.

Additional criteria for development for a Park (57)

PO54

Development for a Park ⁽⁵⁷⁾ ensures that the design and layout responds to the nature of the overland flow affecting the premises such that:

a. public benefit and enjoyment is maximised;

E54

Development for a Park (57) ensures works are provided in accordance with the requirements set out in Planning scheme policy - Integrated design (Appendix B).

- impacts on the asset life and integrity of park structures is minimised;
- maintenance and replacement costs are minimised.

Riparian and wetland setbacks (refer Overlay map - Riparian and wetland setback to determine if the following assessment criteria apply)

Note - - W1, W2 and W3 waterway and drainage lines, and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

PO55

Lots are designed to:

- minimise the extent of encroachment into the riparian and wetland setback;
- b. ensure the protection of wildlife corridors and connectivity;
- c. reduce the impact on fauna habitats;
- d. minimise edge effects;
- e. ensure an appropriate extent of public access to waterways and wetlands.

E55

Reconfiguring a lot ensures that:

- a. no new lots are created within a riparian and wetland setback;
- b. new public roads are located between the riparian and wetland setback and the proposed new lots.

Note - Riparian and wetlands are mapped on Schedule 2, Section 2.5 Overlay Maps – Riparian and wetland setbacks.

Movement network figures

Figure 1 - Morayfield - Anderson Road



Figure 2 - Deception Bay - Bailey Road / Park Road



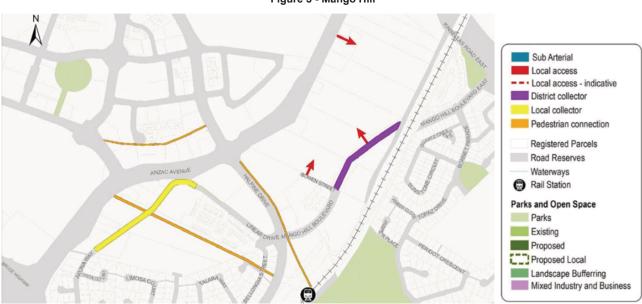


Figure 3 - Mango Hill

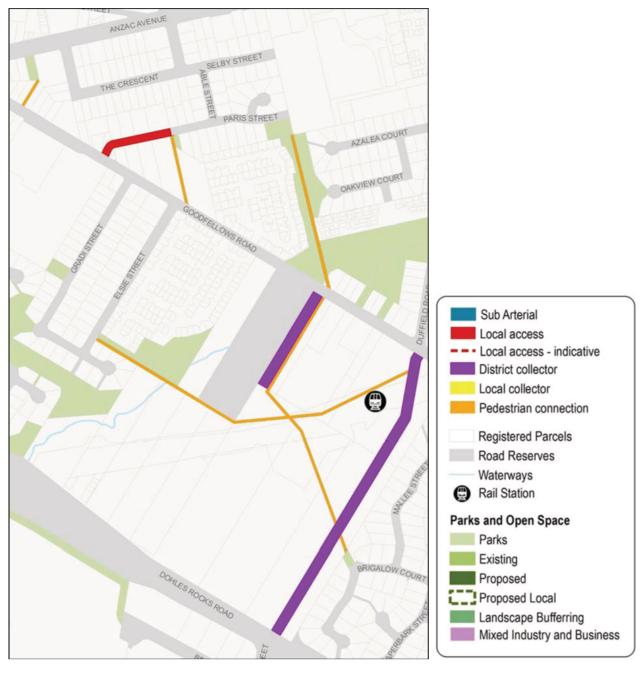


Figure 4 - Kallangur